Technical Manual

L19

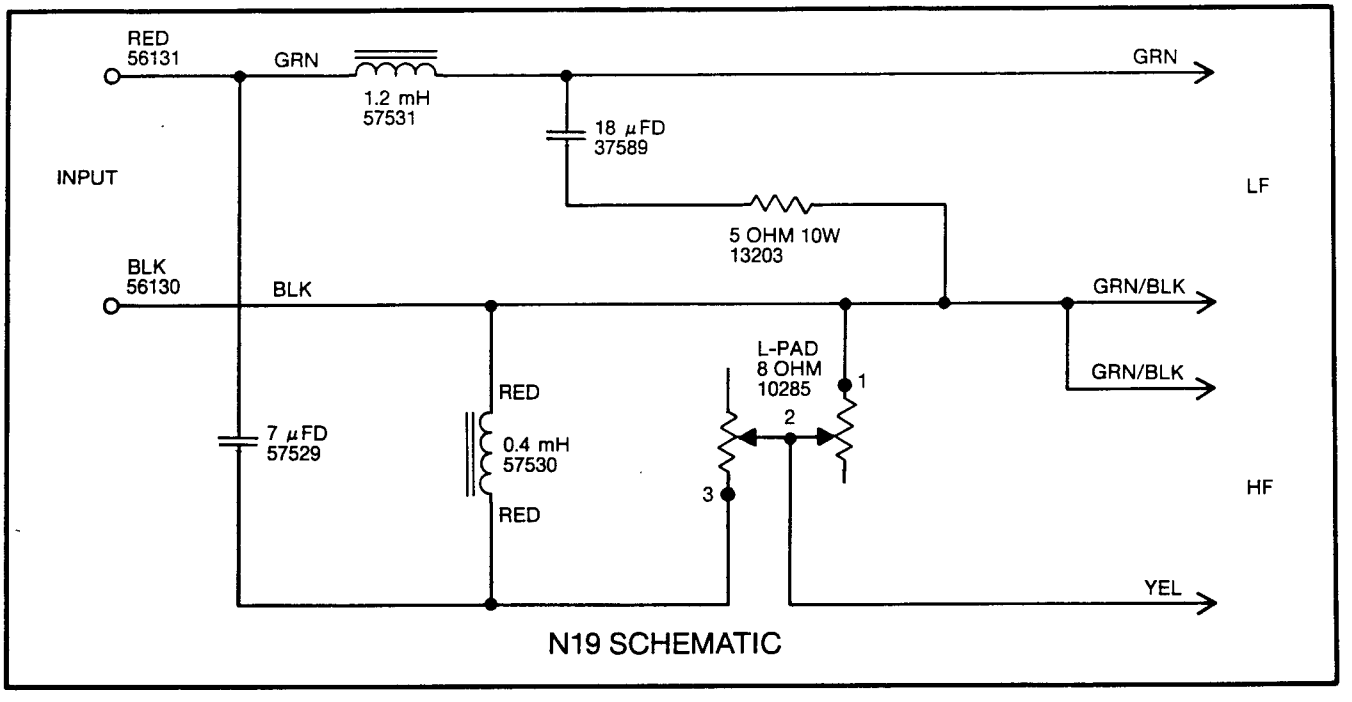

N19 SCHEMATIC

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER:	116A
Cone Kit:	C8R116A
Nom. Impedance:	8 Ohm
Dynamic Test Input V:	5
Sweep Frequency Hz:	30-1200
D.C. Resistance Ohms:	5.0 minimum 5.4 maximum
Gap Gauge:	.044"
Notes:	Dome Inverted
If Not Serviceable,	
Replace With:	116H-3
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No. Slightly different. Replace both units in a stereo pair.
Additional Parts Currently Available*:	
Dome:	50201
Terminal Board:	52348
Mounting Gasket:	52671
Trim Gasket:	52316

HIGH FREQUENCY DRIVER:	LE26
Diaphragm Kit:	D8RLE26
Nom. Impedance:	8 Ohm
Dynamic Test Input V:	3
Sweep Frequency Hz:	500-1200

HIGH FREQUENCY DRIVER (Cont'd)

D.C. Resistance Ohms:	3.4 minimum 4.3 maximum
Gap Gauge:	.029"
Notes:	Plastic Flange
If Not Serviceable,	
Replace With:	035TiA
Visual Change:	Yes
Baffle Modification:	Yes
Exact Acoustic Replacement:	No. Use as a last resort. Replace both units in a stereo pair.
Additional Parts Currently Available*:	
Trim Ring:	57732
Mounting Gasket:	50949-02
Dome:	21606

SYSTEM SPECIFICATIONS:

Nominal Impedance:	8 Ohm
Power Capacity:	35 Watts Continuous Program
Crossover Frequency:	2.5 kHz
Sensitivity:	87dB (1 Watt @ 1 Meter)
Enclosure Dim:	21" x 13" x 10" D 533mm x 330mm x 254mm
Shipping Weight:	29 lbs. - 13.1 kg.
Additional Parts Currently Available*:	
Binding Posts: Red:	56131
Black:	56130

*Other parts may also be available. Check with JBL for details.